




RIV 2330

Valvola di fondo tubolare


Disegni tecnici e tavole

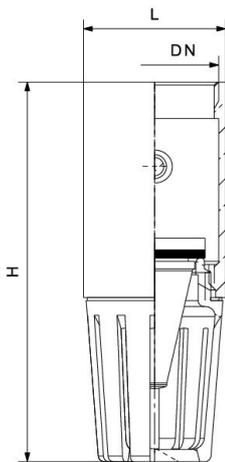

DN	Codice	H	L	PN	KG	P/box
3/4"	032330000005	95	30	10	0,21	1
1"	032330000007	111	39	10	0,31	1
1"1/4	032330000008	127	46	8	0,43	1
1"1/2	032330000009	140	54	8	0,63	1
2"	032330000011	165	65	8	0,96	1
2"1/2	032330000013	173	82	6	1,56	1
3"	032330000014	196	99	6	2,25	1
4"	032330000016	218	116	6	3,56	1

Dati tecnici

RIV **2330**

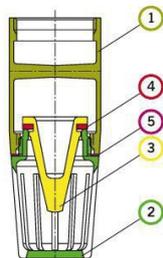


Materiali


1	Corpo	Ottone	CB754S
2	Filtro	Ottone	CB754S
3	Guarnizione	Fibra	
4	Guarnizione	NR	
5	Otturatore	Ottone	3/4"-1"1/4 CW617N 1"1/2-4" CB754S

Attacco	ISO 228/1
Limite	-10°C (in assenza di liquido) + 90°C
Note	La pressione max. di utilizzo (PN) si intende a temperatura ambiente di circa 23°C.

Perdita di carico

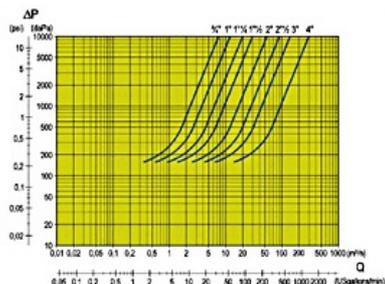

Pressione/Temperatura

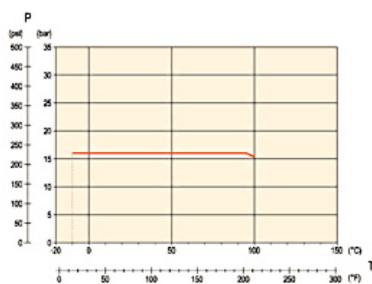

Coefficienti Kv e Cv

Dimensione	Kv	Cv
1/2"	6,5	-
3/4"	12,0	-
1"	20,0	-
1"1/4	31,0	-
1"1/2	50,0	-
2"	79,0	-
2"1/2	130,0	-
3"	210,0	-
4"	370,0	-
5"	750,0	-
6"	1300,0	-